


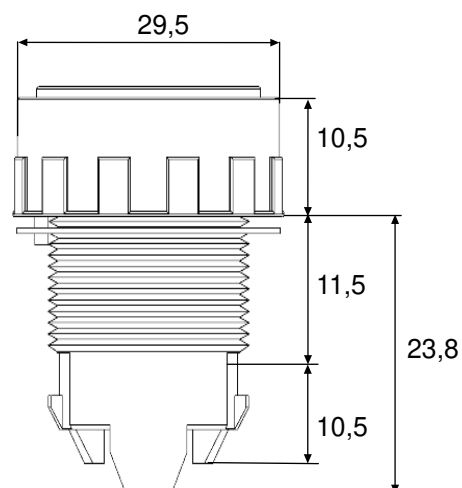

Dati tecnici / Technical informations

Tipo / type

ER **Pulsante** **Flush button**

Colori disponibili
Available colours



Grado di protezione
Protection degree

IP55 / IP65 with protection cap

Temperatura di impiego
Operation temperature rating

-20°C to +55°C

Temperatura di stoccaggio
Stockage temperature rating

-40°C to +70°C

Durata meccanica
Mechanical life

3.000.000

Normative
Standard compliance

IEC 60947-5-1, EN 60947-5-1
ROHS, Reahs, SIQ certificate

Tipi di materiali corpo
Type of material

PA6 - Nylon 30% fiber

Tipi di materiali pulsante
Material for button

PA66 - Nylon