


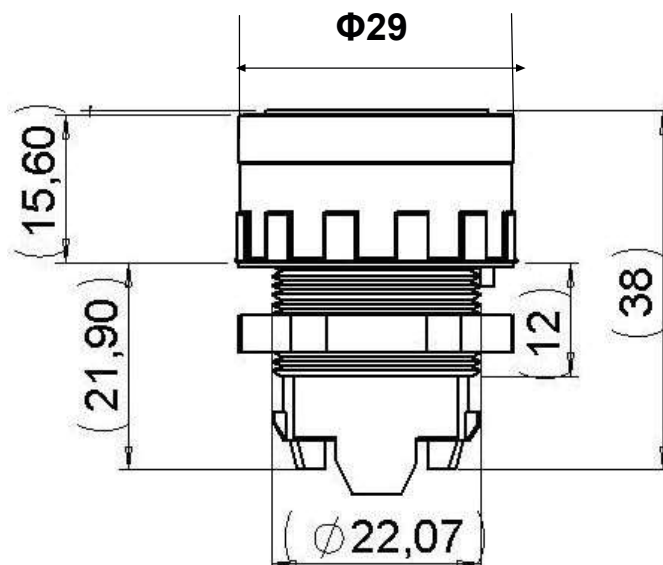

Dati tecnici / Technical informations

Tipo / type

ERL

Pulsanti rasati luminosi Illuminated flush button

Colori disponibili
Available colours



Grado di protezione
Protection degree

IP65 (IP67 with protection cap)

Temperatura di impiego
Operation temperature rating

-20°C to +55°C

Temperatura di stoccaggio
Stockage temperature rating

-40°C to +70°C

Durata meccanica
Mechanical life

3,000.000

Normative
Standard compliance

IEC 60947-5-1, EN 60947-5-1
Rohs, Reach, SIQ certificate

Tipi di materiali corpo
Type of material body

PA6 - Nylon 30% fiber

Tipi di materiali coppette
Type of material lens

Makrolon